



GROUND FLOOR PLAN
SCALE: 1:300

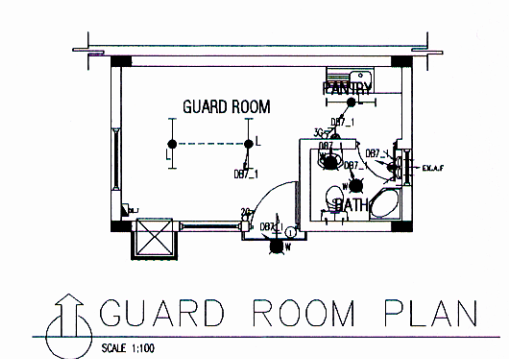


GUARD ROOM PLAN
SCALE: 1:100

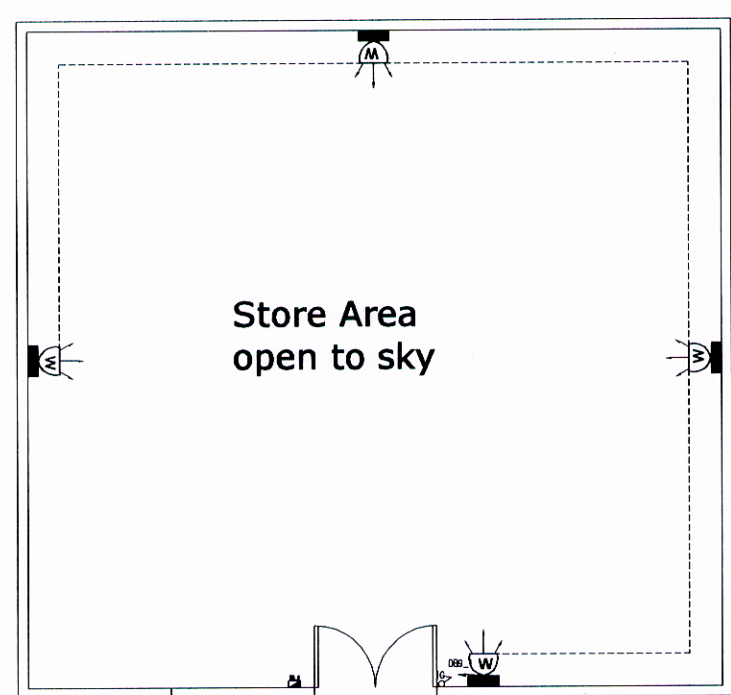

Store Area
open to sky

SCHEDULE OF LIGHT FITTING	
TYPE	DESCRIPTION
◆	RECESSED MOUNTED DOWNLIGHT, 100W LOW VOLTAGE FLUORESCENT HALOGEN WITH DICHRIC REFLECTOR, GOLD FINISHED, FIXED TYPE WITH 240V/12V TRANS
◆	150 WATTS QT-DE HALOGEN LAMP WALL MOUNTED FITTING WITH DIE CAST ALUMINUM SUPPORT AND DIE CAST ALUMINUM OF BASS COMPLETE WITH SAFETY GLASS ON TOP OF THE DIFFUSER (IP44)
◆	100 WATTS QT-DE HALOGEN LAMP CILING MOUNTED FITTING WITH DIE CAST ALUMINUM SUPPORT AND DIE CAST ALUMINUM OF BASS COMPLETE WITH SAFETY GLASS ON TOP OF THE DIFFUSER (IP44)
◆	FLOOD LIGHT WITH 400W HPW LAMP 240V/50HZ 5M HEIGHT WATER PROOF TYPE
◆	FLOOD LIGHT WITH 300W HPW LAMP 240V/50HZ 5M HEIGHT WATER PROOF TYPE
A1	4x18 WATTS RECESSED MODULAR 600x600mm SEALED LUMINAIRE IP54 WITH PRISMATIC (PL) DIFFUSER AND HF ELECTRONIC CONTROL GEAR, DIFFUSER FRAME SECURED BY 1/4 TURN FASTENERS
A1+E	SAME AS ABOVE BUT WITH INTEGRAL EMERGENCY CONVERSION KIT FOR 3 HRS.
A	4x18 WATTS RECESSED MODULAR 600x600mm LUMINAIRE BODY IN WHITE STONE ENAMELED STEEL HIGH FREQUENCY ELECTRONIC BALLAST WITH SPECIAL ALUMINUM LUGS TO LG3 CAT 2 MIRROR FINISH
A+E	SAME AS ABOVE BUT WITH INTEGRAL EMERGENCY CONVERSION KIT FOR 3 HRS. DURATION
L	1x30W RECESSED MOUNTING TYPE (FOR STEEL STRIPS) LIGHT FITTING 1x36 FLUORESCENT LAMP, IP-54
A+E	SAME AS ABOVE BUT WITH INTEGRAL EMERGENCY CONVERSION KIT FOR 3 HRS. DURATION
W	2x30W SURFACE MOUNTED WITH ACRYLIC DIFFUSER, IP65, FLUORESCENT LIGHT FITTING POLYCARBONATE CONTROLLER, HIGH FREQUENCY BALLAST
W+E	SAME AS ABOVE BUT WITH INTEGRAL EMERGENCY CONVERSION KIT FOR 3 HRS. DURATION
⌚	LIGHT SWITCH 1-GANG, 1-WAY, 240V, 10A
⌚	LIGHT SWITCH 1-GANG, 2-WAY, 240V, 10A (Mer-e-tour)
⌚	CONVENTIONAL DIMMER SWITCH, 240V, 1500W
☐	INDICATION FOR WEATHERPROOF TYPE FITTING
⊕	WALL MOUNTED FAN
⊙	HIGH BAY INDUSTRIAL TYPE FUTURE WITH 300W HPW LAMP 240V, 50HZ

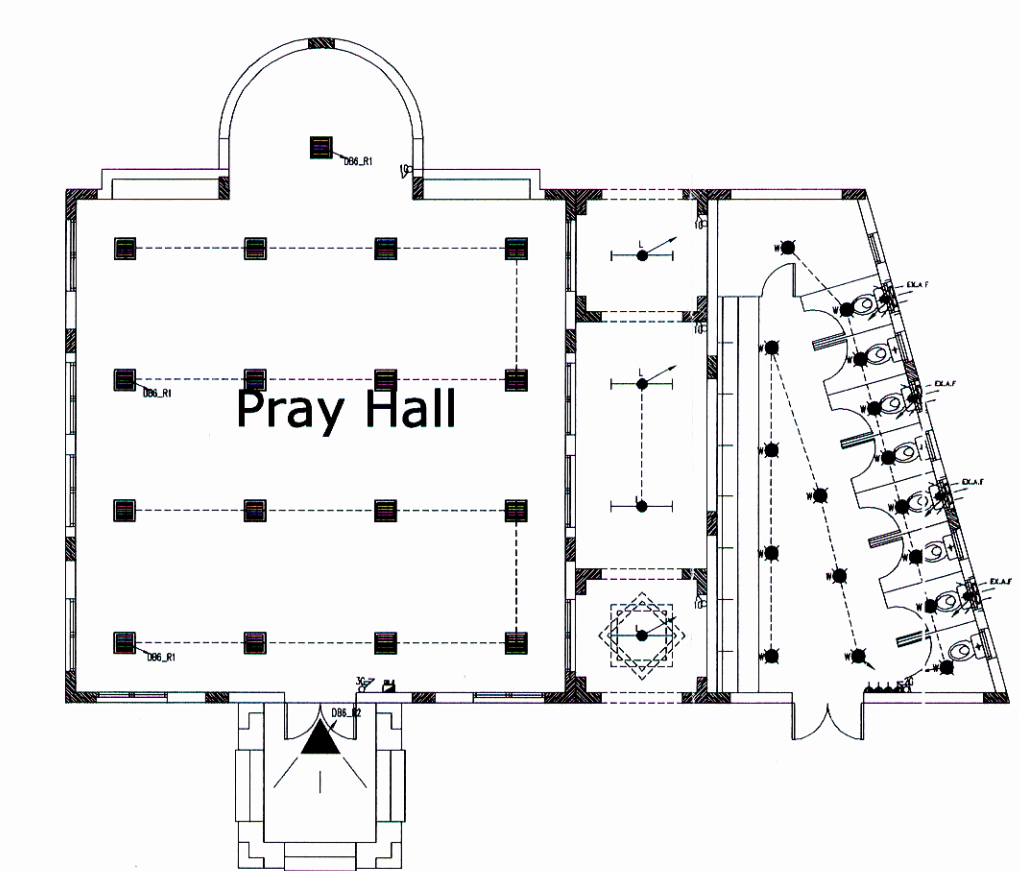

Pray Hall

BP # 69105
21/5/2013

U.D.D. STAMP		MUNICIPALITY STAMP	
Enquiry No. :		Application No. :	
CONSULTANT REG. No. :	GRADE : A	CONSULTANT REG. No. :	GRADE : A
CONSULTANT STAMP & SIGNATURE :		CONSULTANT STAMP & SIGNATURE :	
TECHNICAL MANAGER :		TECHNICAL MANAGER :	
REGISTRATION No. :		REGISTRATION No. :	
<p>الأقصى للاستشارات الهندسية AI- AQSA Engineering Consultancy (Q.E.C)</p>			
PROJECT AGRI GREEN			
FACTORY(G), OFFICE(G+1), STORE AND DINING ROOM			
LOCATION: INDUSTRIAL AREA			
CLIENT: ENG. ADNAN FAHAD AL NAIMI			
DATE: OCTOBER, 2012	JOB NO.:		
TITLE: ELECTRICAL LAYOUT (LIGHTING) GROUND FLOOR PLAN, Pray Hall, Store Area & GUARD ROOM			
DRAWING NO.: E-01	SCALE: 1:100		
DRAWN BY:	DESIGNED BY:	CHECKED BY:	
CAD FILE:	REGISTRATION No. :	REGISTRATION No. :	
REVISION:	SIGNATURE	SIGNATURE	